



# BaByliss-Expert Plus 2000 Hairdryer Thermal Fuse Replacement

we will show how to disassemble this type of hairdryer and replace the thermal fuse

Written By: Tiago





## TOOLS:


- [Spanner 4.0 screwdriver](#) (1)
  - [iFixit Opening Tools](#) (1)
  - [Phillips #2 Screwdriver](#) (1)
-

## Step 1 — Thermal Fuse




- ⚠ Before disassembly, unplug the device.
- ⚠ Make sure the device was not on for the last 10 minutes, because it might still be hot.
- Unscrew the two screws on the handle with the spanner screwdriver.

## Step 2

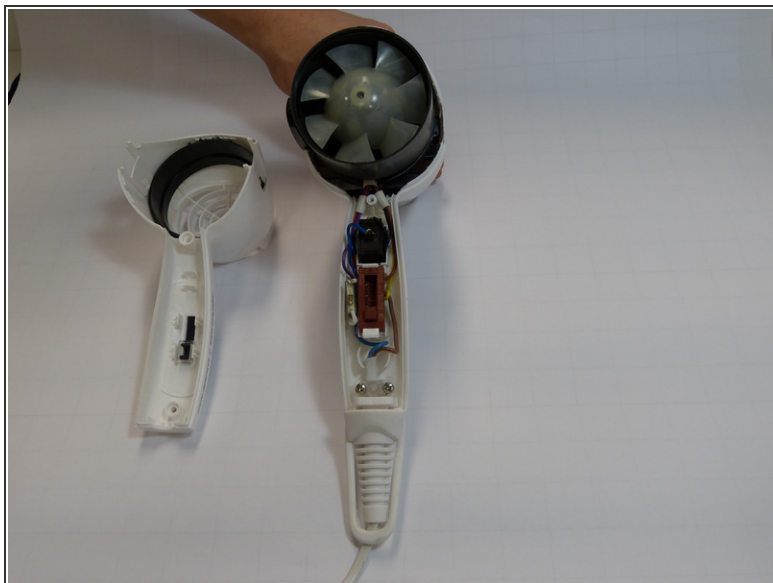

- Pull the case in opposite directions.
- ⓘ You might need a prying tool if the black components don't come out easily.


## Step 3

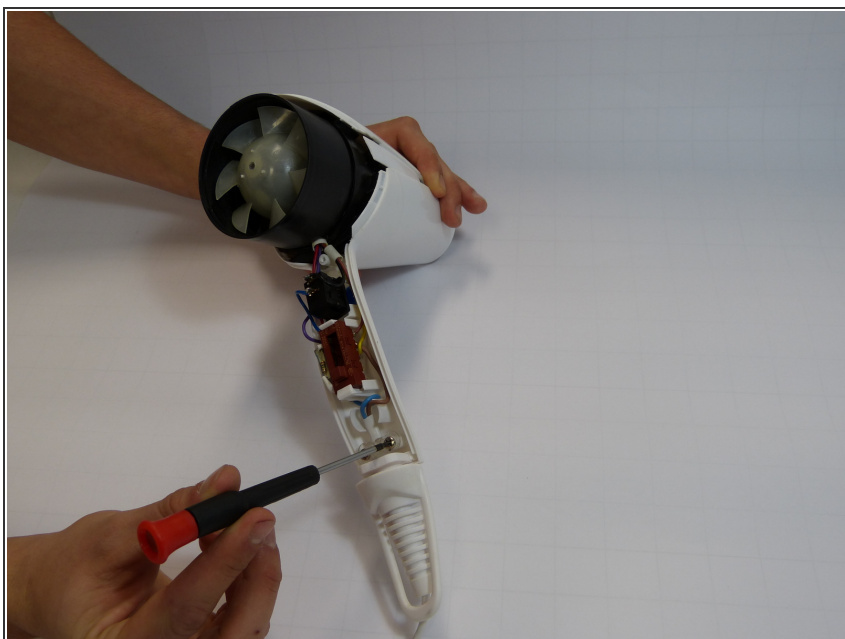

- Unscrew the remaining two screws inside the handle with the Phillips screwdriver.




## Step 4

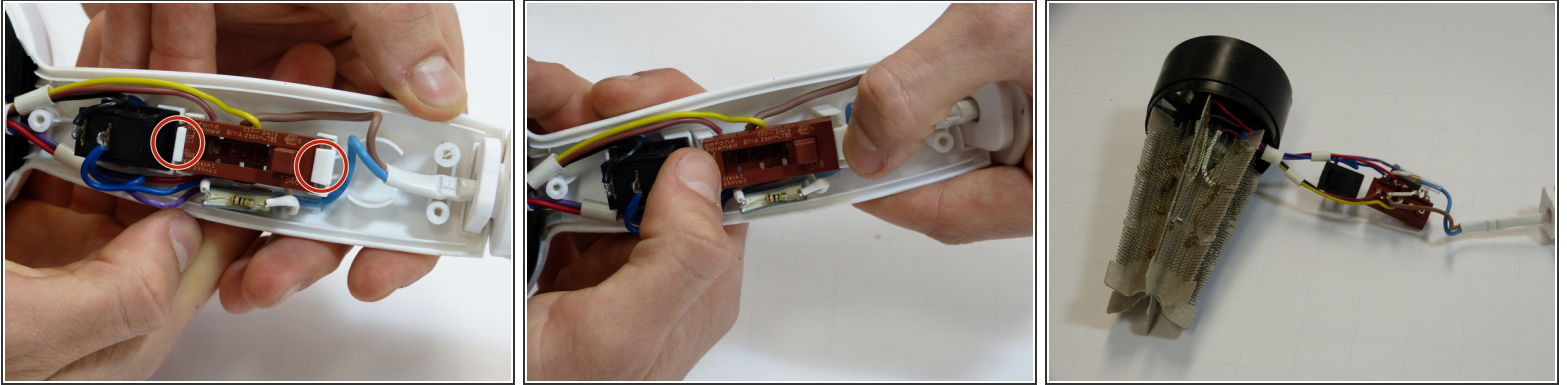


- Push the inner components out of the handle.

## Step 5

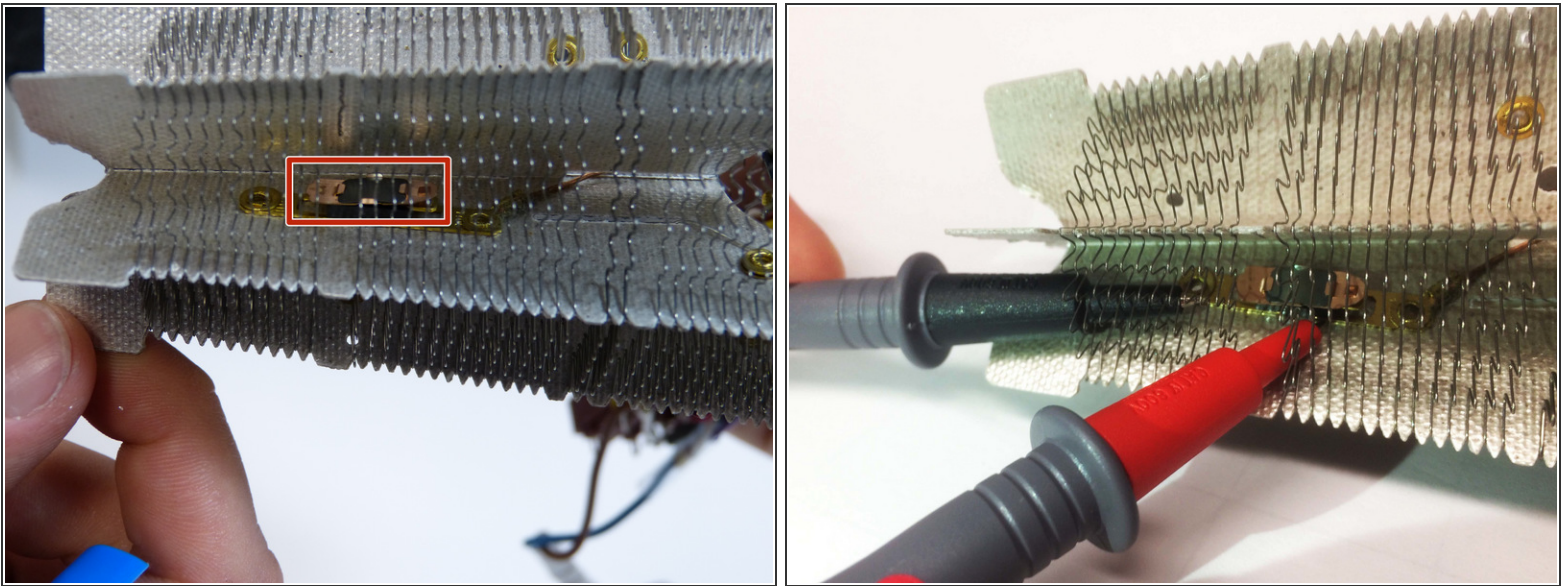


- Locate the thermal fuse.
- Test the thermal fuse for continuity using the multimeter.
- ⓘ Make sure the multimeter is set to 200 ACV and bring the probes toward thermal fuse.
- The circuit is closed and properly functioning if the multimeter displays varying numbers.
- The circuit is open if the multimeter displays non-varying numbers or no numbers at all.

## Step 6

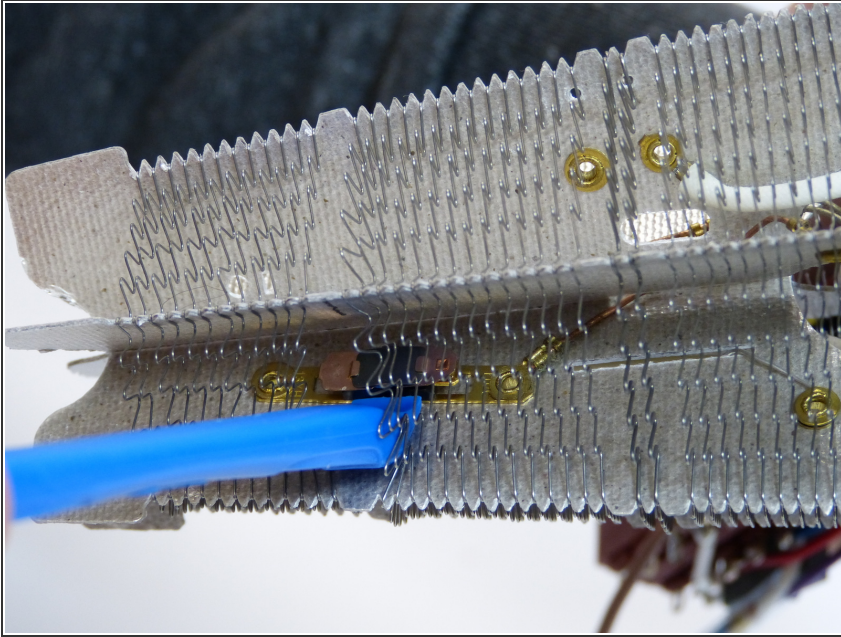

- To replace the thermal fuse, use the prying tool to extract the object.
- ⓘ To remove it, wedge it back and forth until it comes free.
- ⓘ You don't need to take out the gold piece under the thermal fuse.

## Step 7

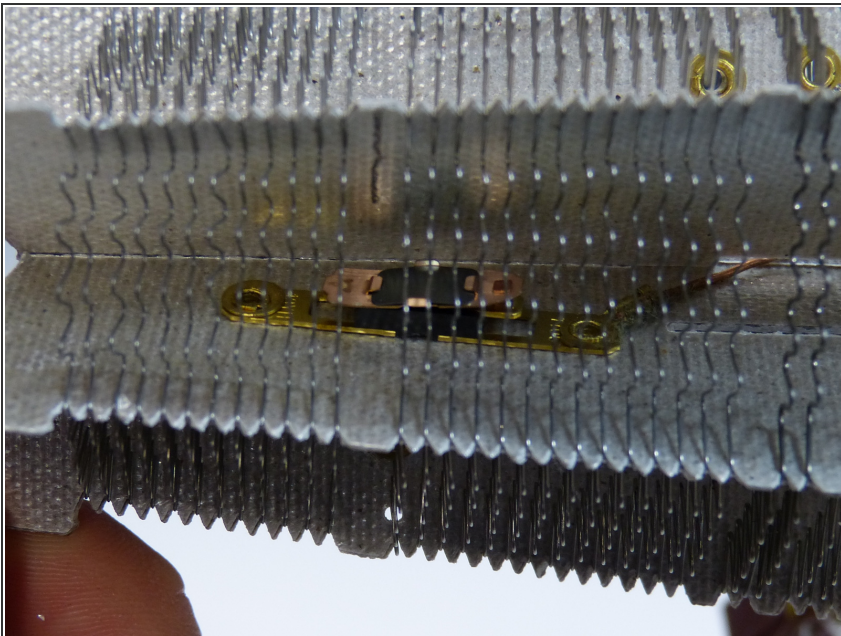

- Replace the old thermal fuse by a new one.

To reassemble your device, follow these instructions in reverse order.

This document was last generated on 2017-08-05 08:53:46 AM.